



IMAGE NOT
AVAILABLE

SPECIFICATIONS

2-way flush-fit single control external part

Chrome



Auto return deviator


Invisible o-ring resistance

Waterproof wall fixing

50% two step cartridge for water saving

Packaging: 24 x 25 x 8 cm / 0,0048 m³ / 0,6 kg

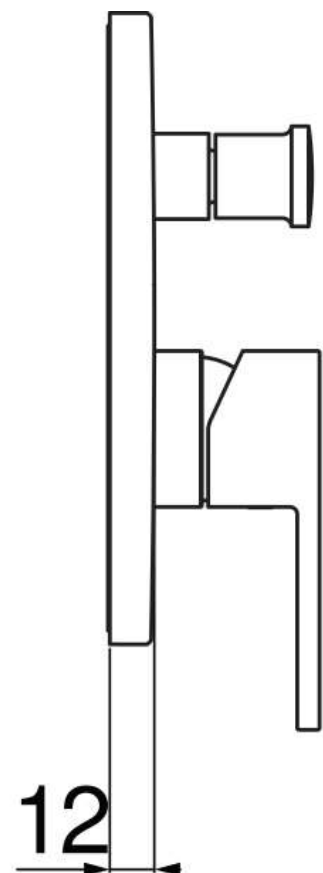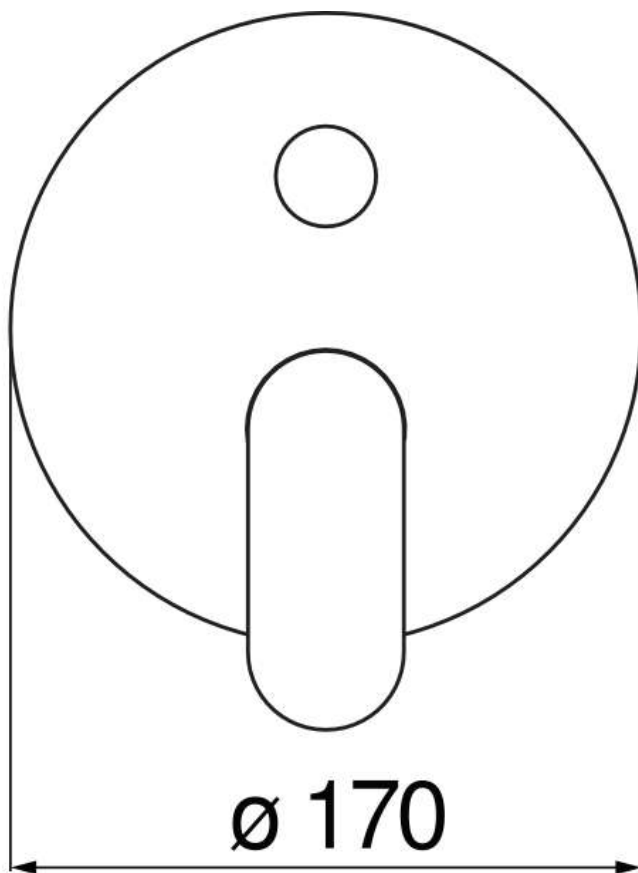

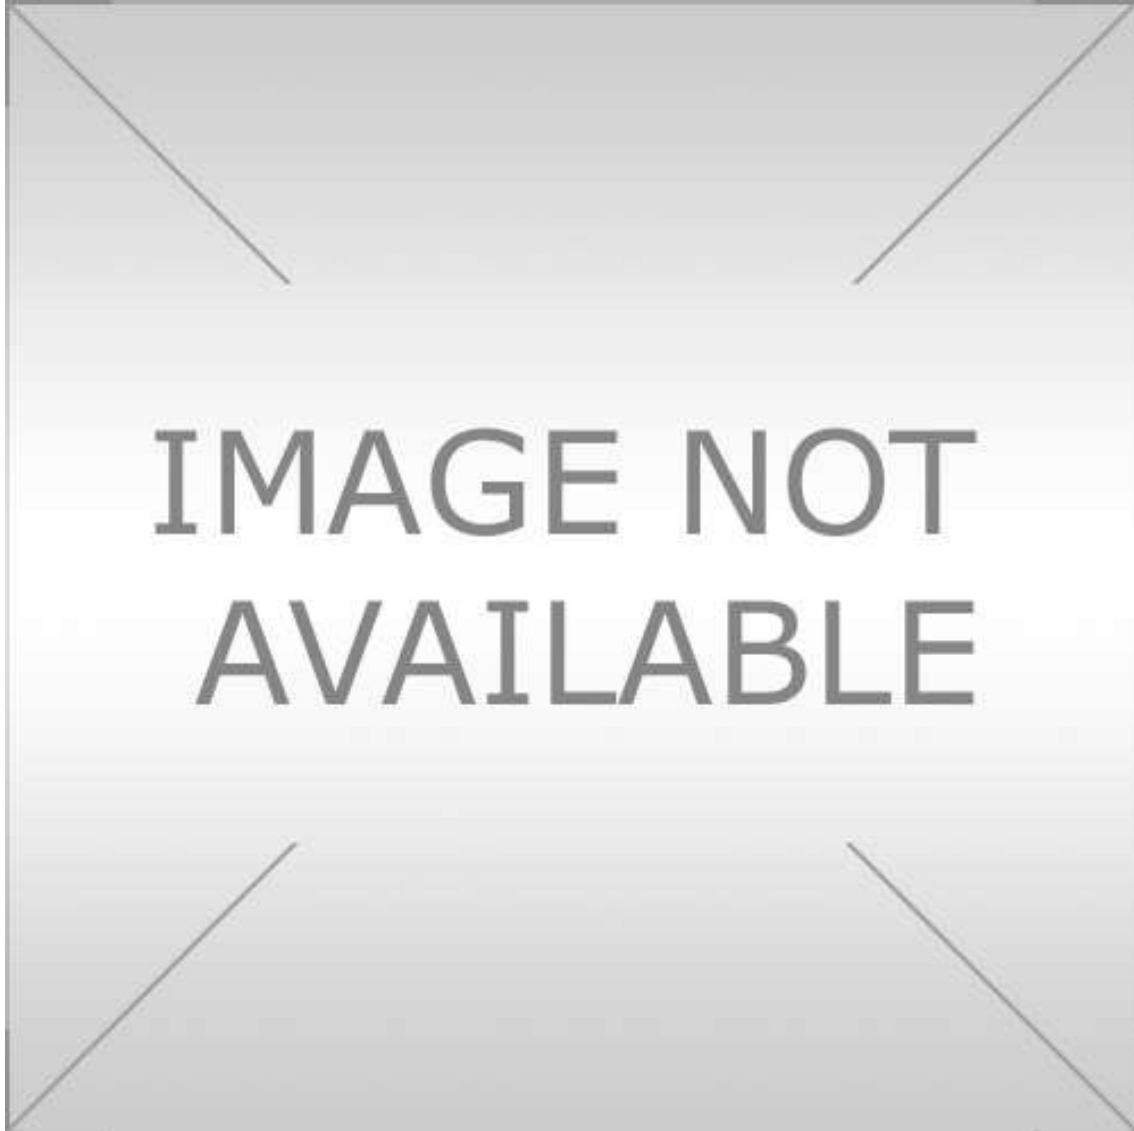

SPECIFICATIONS


Required flush-fit part

-


ø 1/2" outlets

Also suitable for assembly on plasterboard

Packaging: 19,5 x 10 x 15,5 cm / 0,003022 m³ / 1,4 kg

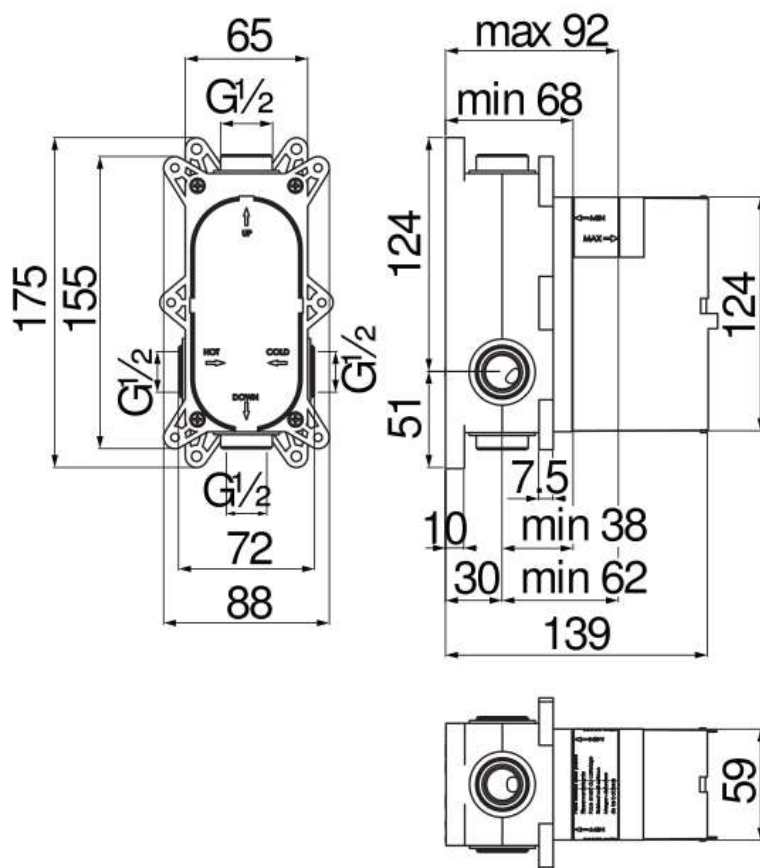

FLOW RATE DIAGRAM: HOT/COLD WATER

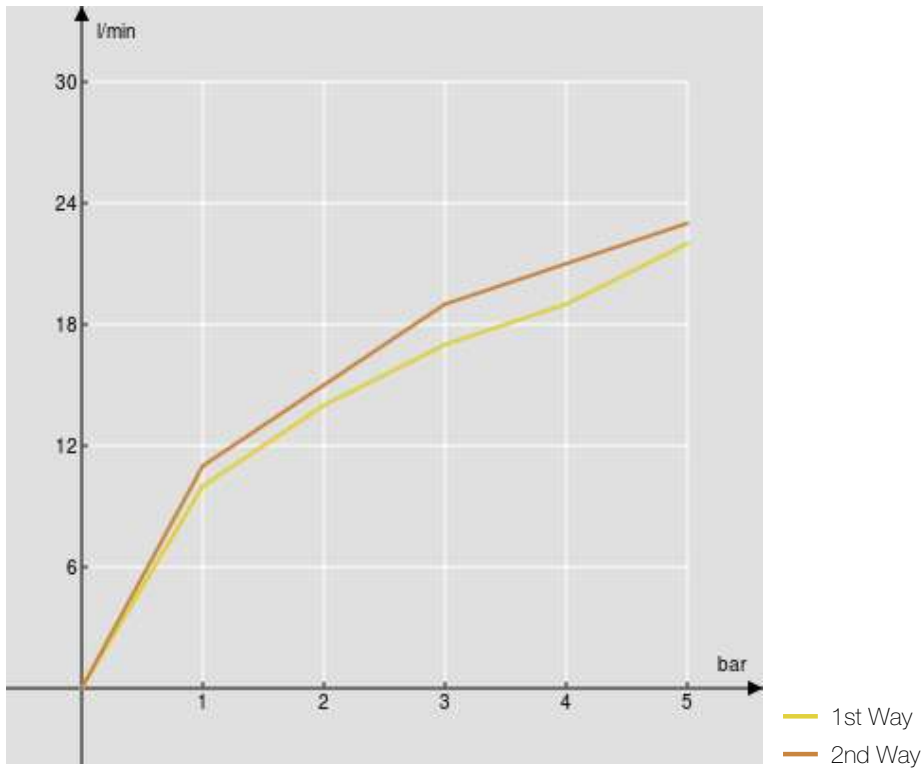

FLOW RATE DIAGRAM: MIXED WATER

